
CONCEPT, NOT FOR FABRICATION

BankHaul · github.com/BoujeeEnjinia1701/bankhaul

REV	DESCRIPTION	DATE	BY
P1	Preliminary GA for TRL 3 (from cad/src/model.py)	2026-10-03	AC
P2	BKH-DDR-002: design for construction	2026-10-03	AC
P3	BKH-DDR-003: far stake 5.0 m long, driven 3.5 m (decision 14A)	2026-10-03	AC
P4	Kit 1.9 D3 model; D-S1 pad eye 64 radial; D-S3 stays 1,110 between thimbles	2026-10-25	AC

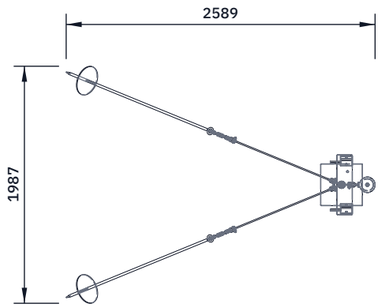


TOP VIEW

Scale 1:50; looking down (along -Z)




FRONT VIEW

Scale 1:50; looking at the front (along +Y)

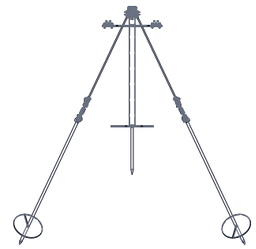

RIGHT VIEW

Scale 1:50; looking at the right side (along -X)

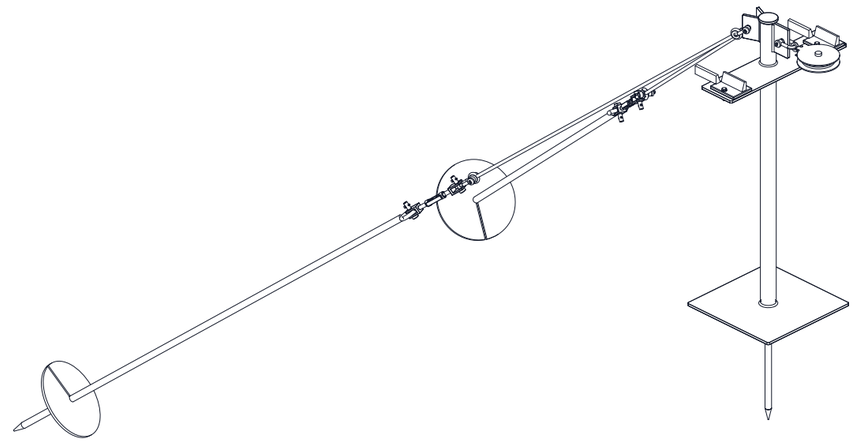

ISOMETRIC VIEW

Not to scale; ground at z = 0; seen from the front right and above, about 30 deg elevation

MAIN DIMENSIONS AND INTERFACES (MM)

Post 48.3 x 3.2 tube, head 1,000 above the ground; weldment 17.2 kg (1)
Foot plate 350 x 350 x 8; ground spike 20 round, 400 below the plate
Pad eye 8 plate 64 radial, 18 hole 64 from the axis, 950 up (8, 13)
Near sheave centre 216 in front of the post; legs 112 apart
Two stay lugs, 15 holes, 960 up, splayed 22.2 deg either side of the line
Back-stays 10 rope, 1,111 between thimbles; M12 turnbuckles to the anchors (5, 12)
Anchor eyes 1,100 behind and 450 either side; rods in line with the stays (11)
Cleat bar 130 x 500 x 8 slipped over the post, top 850 up; jam cleats 200 either side (10)
Tie-off hole 15 dia in the cleat bar for the net's near end
Third-angle; front view from -Y; the loop runs out to +X; (n) = BOM line

BANKHAUL

github.com/BoujeeEnjinia1701/bankhaul

Bank station: general arrangement

DRAWING NO.	REV	SHEET	SIZE
BKH-DWG-001	P4	1 of 1	ANSI B

SCALE	UNITS	PROJECTION	DATE	DRAWN
1:50	mm		2026-10-03	Amish Chadha

MATERIAL / NOTES

Steel weldment, bought blocks, anchors and rigging per bom/bom.csv. PRELIMINARY, NOT FOR FABRICATION

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand